


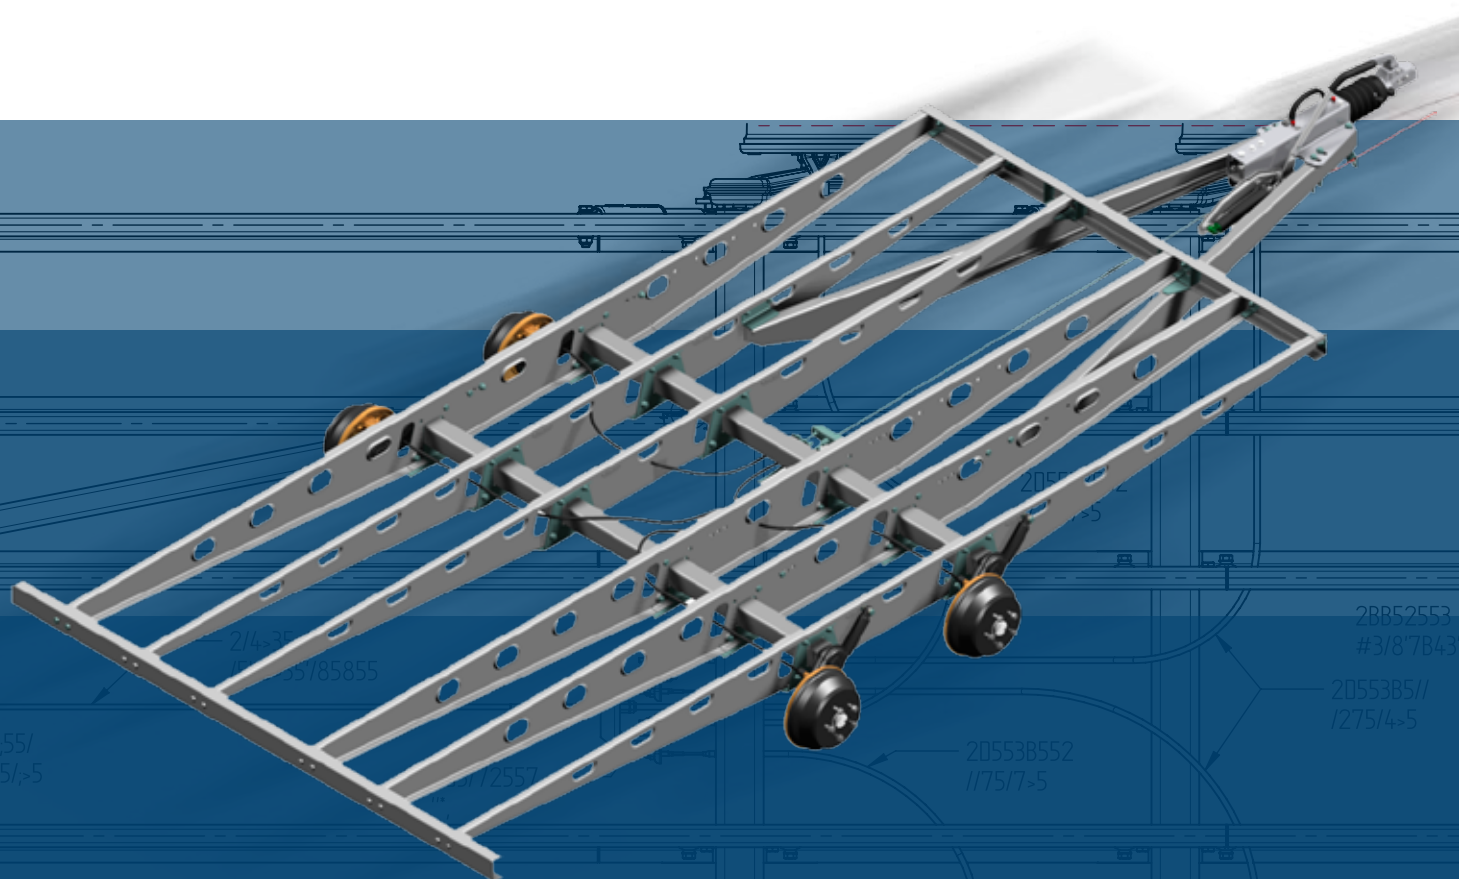

ALVÁZ

234855/
85+85/5

214-35
1/4'386/85855

1/2557

255-557
1/4'386/25'383




205538552
1/75/7-5

28852553
#3/8'7843

20553851/
1/275/4-5

255-557
1/4'386/25'383

KÖNNYŰSZERKEZETES ÖNHORDÓ ALVÁZ

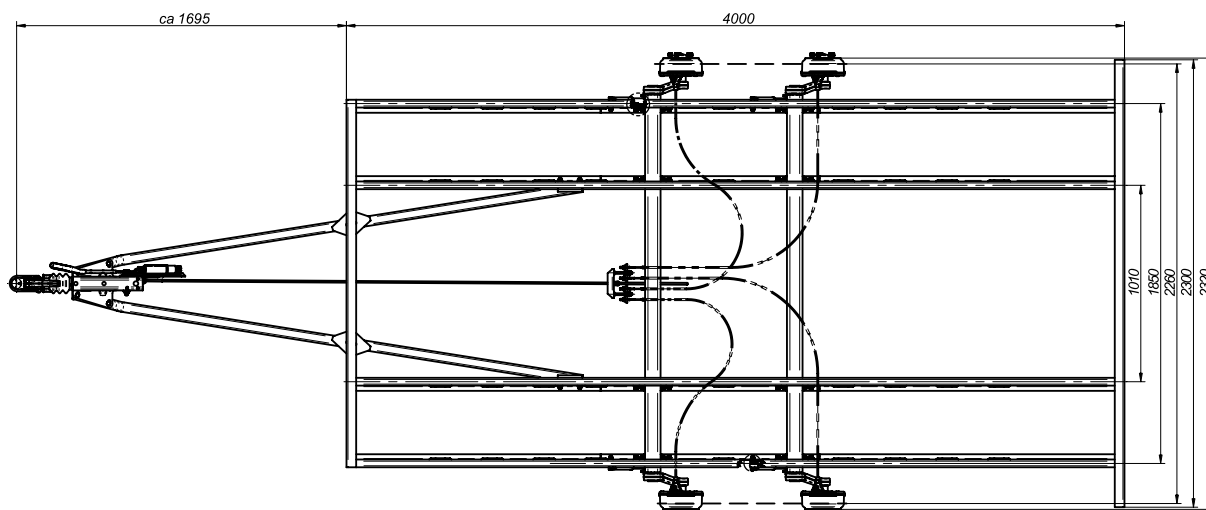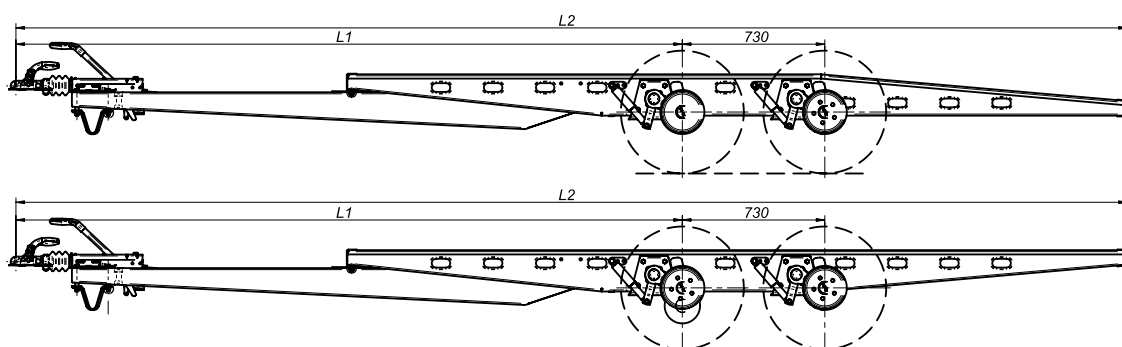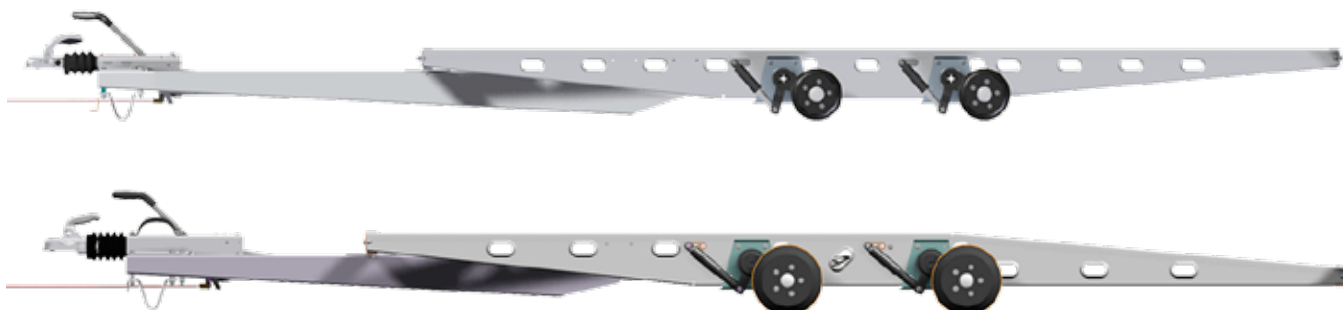

Típus	L (mm)	L1 (mm)	L2 (mm)	Önsúly (kg)	Függ. terh. max.(kg)	Cikkszám	Verzió
UT2000	4000	3415	5695	295	2000	6A6721.001	szerelt
UT2700	4000	3415	5695	305	2700	6A6722.001	szerelt
UT3500	4000	2990	5270	671	3500	6B3011.001	szerelt
AT2000	4000	3415	5695	295	2000	6A6723.001	szerelt
AT2700	4000	3415	5695	305	2700	6A6724.001	szerelt
AT3500	4000	2990	5270	663	3500	6B2861.001	szerelt





KÖNNYŰSZERKEZETES ÖNHORDÓ ALVÁZ



Alváz általános használatú utánfutókhoz
Teherbírási 2700 kg-ig


Alváz autószállító utánfutókhoz
Teherbírási 3500 kg-ig

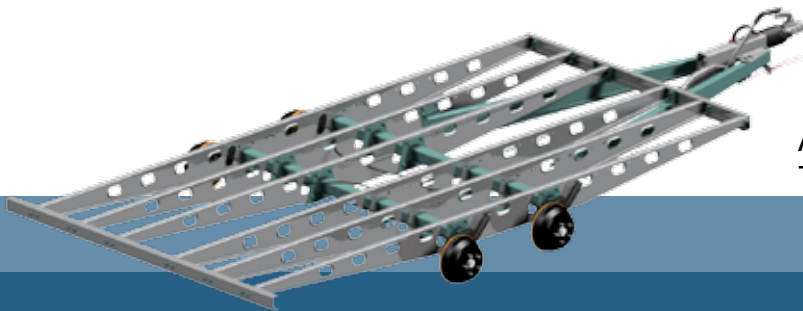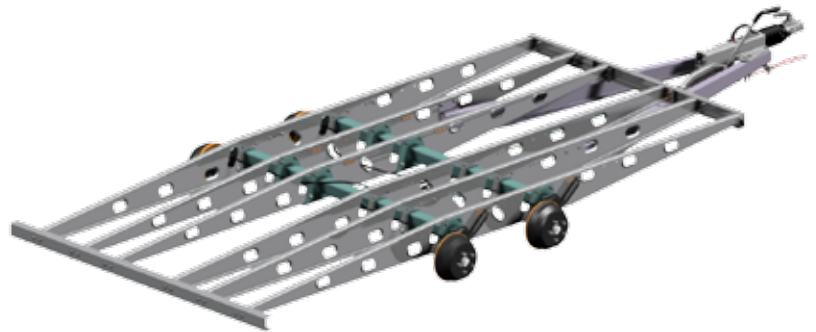

Alváz általános használatú utánfutókhoz
Teherbírási 3500 kg-ig

- Szerelhető kivitel
- Tűziorganyzott felületkezelés
- Tetszőleges felépítménnyel csatlakoztatható
- Kis tárolási és szállítási helyszükséglet
- Könnyűszerkezetes design
- Mono és tandem változat
- Könnyen összeszerelhető
- Kérésre lengéscsillapítóval szerelve


- Knott offers high capacity and lightweight loading ramps.
- The capacity of our loading ramps range from 400 to 4000 kg (per pair of ramps).
- The range of available length is also wide, from 1500 mm up to 3000 mm.
- Depending on your needs, we offer deflected and non-deflected loading ramps.
- Non-deflected loading ramps are also available in a reinforced version where capacity can range up to 4000 kg at a length of 3000 mm – Cat. No. 408970.002. The non-reinforced loading ramp of the same size has a capacity up to 2000 kg (per pair of ramps) – Cat. No. 408970.001
- The deflected loading ramps intended for lower loads are available in 3 length options and 2 width options.
- The maximum capacity of deflected loading ramps is 1000 kg.
- How to determine the vehicle length correctly:

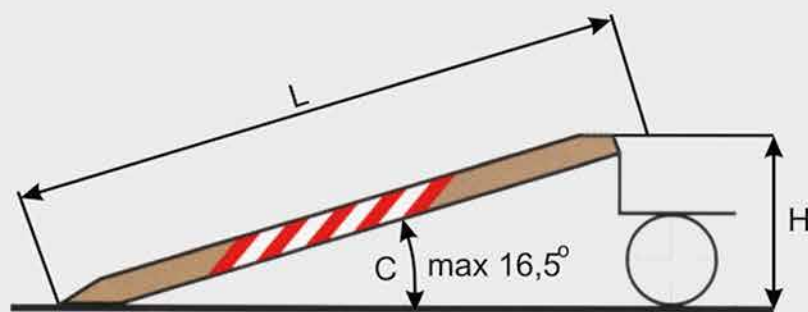

$$L = \frac{H}{C} \times 100 \quad \text{where:}$$

- vehicle length [mm]
- height [mm]
- inclination [%]

- Safety rules:
- The inclination of loading ramps cannot exceed 30%, which corresponds to the angle of approx. 16.5°.
- The loading ramp must be fixed at the end to protect it from falling

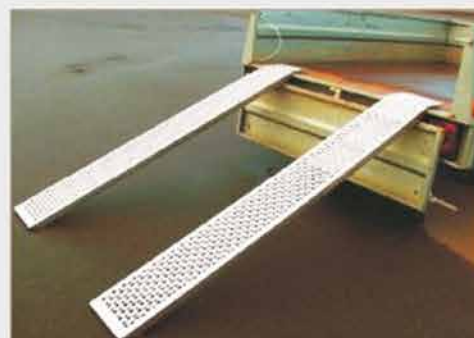

Autóflex-Knott Kft.
 Kecskemét, Kadafalva - Heliport
 Tel.: +36 76 481515
 Fax: +36 76 481494
info@autoflex.hu
www.autoflex.hu

KNOTT GMBH
 Gutenberg str. 21. / D-93128 Regenstauf
 Tel.: +49 9402 93170
 Fax: +49 9402 931796
de1@knott-group.com
www.knott.de